

N9032 Mini Dome Network Camera



3 Megapixel / H.264 / 720P Real-Time / Wide Angle


- 3 Megapixel 1/4" CMOS Sensor in High Resolution
- H.264/MJPEG Dual Codec & Streaming simultaneously
- Fixed Lens 2.8mm F2.0
- Up to UXGA (2048x1536@22fps)/WXGA (1920x1080@30fps)
- Digital I/O for External Sensor and Alarm
- 3D Noise Reduction
- 2 Way Audio Supported
- Intelligent Video Analytics
- Micro SD Card Supported (SDHC up to 32GB)
- PoE Power Over Ethernet IEEE802.3af
- IP 67 Weather+ IK10 Vandal Proof
- EN50155



Specifications

Camera Sensor: 3 MegaPixel 1/4" CMOS sensor Scan Method: Progressive Lens: Fixed Lens 2.8mm, F2.0 Number of Effective Pixel (H*V): 2048x1536 Minimum Illumination: 0.1Lux (F1.6, AGC max.) Horizontal Resolution: 1400TVL Dynamic Range: 71db SNR(max): 42.3db DNR: Auto White Balance: Auto Gain Control: High/Middle/Low, 3 step selection Flicker Control: Off/50Hz/60Hz, 3 steps selection Electronic Shutter: Auto Panning Coverage: -15°~ 15° Tilting Coverages: 0°~ 90°	Network Streaming Protocols: RTSP/RTP/UDP, RTSP/RTP/TCP, RTSP/RTP/HTTP tunneling, LAN Multicast, Multipart-JPEG Supported Protocols: IPv4, HTTP, UDP, TCP, ICMP, IGMP, ARP, DHCP, NTP, SMTP, FTP, SAMBA, UPnP, PPPoE, DNS, DDNS, RTSP, RTP, RTCP, ONVIF Mobile Surveillance: iPhone, iPad, Android, BlackBerry Processors and Memory CPU: ARM9 SOC 800MHz Flash and Memory: 16MB ROM, 256MB DDRIII I/O and Connectors LAN: 1x RJ-45 Ethernet connector Audio: Audio Line-in, Audio Line-out Factory Default: 1xReset Button Software Compatibility Browser: Internet Explorer 6.0 or above Application Software: VMS Application Software OS supported: Microsoft Windows 2000, XP, Vista, Windows 7 Open API CGI commands to control camera Media SDK to handle streaming Factory Default Button Power Power Input: DC12~36V/ POE Power Consumption: 5W Dimension 111.6mm(Φ)x49.7mm(H) Weight 390g Operating Environment Operating temperature: -25°C~ 55°C Storage temperature: -20°C~ 60°C Storage humidity: 10% ~ 95% Non-condensing Certification CE, FCC Class A, RoHS, IP 67 Weather+IK10, EN50155 Warranty 24 months
Video Video Compression: H.264 (MPEG-4Part 10/AVC)/MJPEG, Dual codec Video Framerate: 2048x1536@22fps/1920x1080@30fps Resolution: H.264 : 3M(2048x1536@22fps), 2M(1600x1200@22fps), 1080P(1920x1080@30fps), 720P(1280x720@30fps), MJPEG : 1.3M(1280x960@15fps), 1080P(1920x1080@15fps), 720P(1280x720@15fps) Bitrate control: CBR and VBR, 128kbps~8Mbps Multi-streams: Dual streaming, Multiple profiles 1920x1080 H.264@30fps/1280x720 H.264(Sub)@30fps 1920x1080 MJPEG@15fps 2560x1920 H.264@15fps/640x480 H.264(Sub)@15fps 1280x960 MJPEG@15fps Digital Zoom (PC side): Digital Image Rotation: Mirror, Flip, Rotate 180°	
Intelligent Video De-noise: Yes Motion detection: Yes Blind detection: Yes Privacy Mask: Yes	
Audio 2 Way Audio: Audio Line-in, Audio Line-out Compression: AMR, G.711 @ 64kbps, G.726 @ 32kbps/ Configure bit rate	

Dimension Diagram

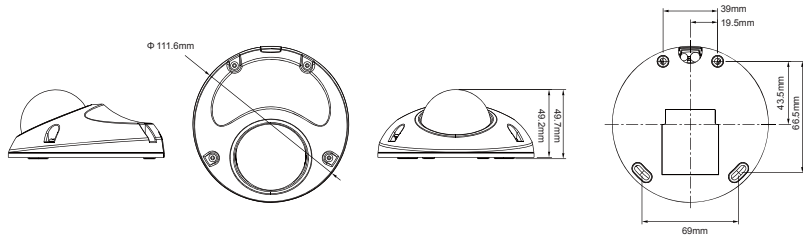

Member of **ONVIF** **CE** **FCC** **RoHS** Compliant

Distributed by:

3S PocketNet Technology Inc.

7F., No.5, Lane 16, Sec. 2, Sichuan Rd. Banqiao Dist.,
 New Taipei City 22061, Taiwan (R.O.C.)
 Tel: +886.2.8967.2909
 Fax: +886.2.8967.2779