

## DH-IPC-HFW8301E

### 3MP WDR Ultra-Smart Network IR-Bullet Camera



### Features

- 1/3" 3 Megapixel progressive scan CMOS
- Support H.264/MJPEG dual codec
- Smart triple streams supported
- Max 25/30fps@3MP(2048x1536)
- Ultra WDR (Wide Dynamic Range) up to 120dB
- Ultra 3D DNR
- Ultra Defog, ROI, EIS
- Smart IR technology
- Smart detection:
  - Face detection
  - Tripwire detection
  - Intrusion detection
  - Scene change detection
- 100/1000M Base-T Ethernet
- Micro SD memory, IP66, PoE,

# DH-IPC-HFW8301E

## Technical Specifications


Model	DH-IPC-HFW8301EP		DH-IPC-HFW8301EN
<b>Camera</b>			
Image Sensor	1/3" 3Megapixel Aptina CMOS		
Effective Pixels	2048(H)x1536(V)		
Scanning System	Progressive		
Electronic Shutter Speed	Auto/Manual, 1/3~1/10000s	Auto/Manual, 1/4~1/10000s	
Min. Illumination	Color: 0. 1Lux/F1.2, B/W: 0.01Lux/F1.2; 0Lux/F1.2(IR on)		
S/N Ratio	More than 50dB		
Video Output	1 channel BNC (1.0Vp-p, 75Ω)		
<b>Camera Features</b>			
Max. IR LEDs Length	30m, Smart IR technology		
Day/Night	Auto(ICR)/Color/B/W		
Backlight Compensation	BLC / HLC / WDR 120dB		
White Balance	Auto/Manual		
Gain Control	Auto/Manual		
Noise Reduction	3D		
Privacy Masking	Up to 4 areas		
EIS	Support		
Ultra Defog	Support		
<b>Lens</b>			
Focal Length	2.7mm~12mm		
Max Aperture	F1.4		
Focus Control	Manual		
Angle of View	H: 82°~25°		
Lens Type	Manual/ Auto Iris(DC)		
Mount Type	Board-in Type		
<b>Video</b>			
Compression	H.264/MJPEG		
Resolution	3M(2048×1536)/1080P(1920×1080)/720P(1280×720) /D1(704×576) /CIF(352×288)		
Frame Rate	Main Stream	3M/1080P (1~25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
	Third Stream	1080P/720P/D1(1 ~ 25/30fps)	
Bit Rate	H.264: 48K ~ 8192Kbps		
ROI	Up to 4 areas		
<b>Audio</b>			
Compression	G.711a / G.711u		
Interface	1/1 channel In/Out		
<b>Smart Function</b>			
Smart detection	Tripwire		
	Intrusion		
	Scene change		

## DH-IPC-HFW8301E


	Missing/Abandoned
	Audio detect
	Face detect
<b>Network</b>	
Ethernet	RJ-45 (10/100/1000Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Compatibility	ONVIF, PSIA, CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
<b>Auxiliary Interface</b>	
Memory Slot	Micro SD, Max 64GB
Alarm	1/1 channel In/Out
<b>General</b>	
Power Supply	DC12V(AC24V optional), PoE (802.3af)
Power Consumption	Max 12W
Working Environment	-20°C~ +60°C, Less than 90% RH
Ingress Protection	IP66
Dimensions	273.3mm × 94.8mm × 94.8mm
Weight	1.3kg

# DH-IPC-HFW8301E

## Dimensions (mm)

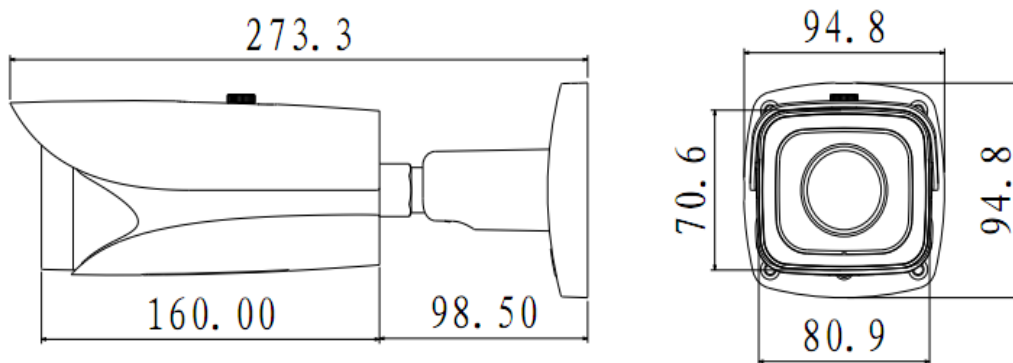

## Accessory (optional)

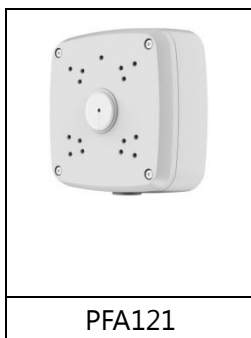

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.